


ORDER GUIDE - POWER & CONTROL HANDHELD RGB/W DIMMER | S3I



PART NUMBER




Notes:

DATA


Output Signal	RF Signal
Operation Frequency	869.5 / 916.5 / 434 MHz
Power Supply	3 AAA Batteries (included)
Operating Temperature	32° to 86° F (0° to 30° C)
Wireless Range	50' Ft (15.24 m)
Input Voltage	12 ~ 36 VDC
Dimming	PWM / PFM IEEE PAR1789 No Effect Level Green for Flicker when used with Nova Flex drivers and Dimming modules.
Dimming Control	Proprietary RF

DIMENSIONS

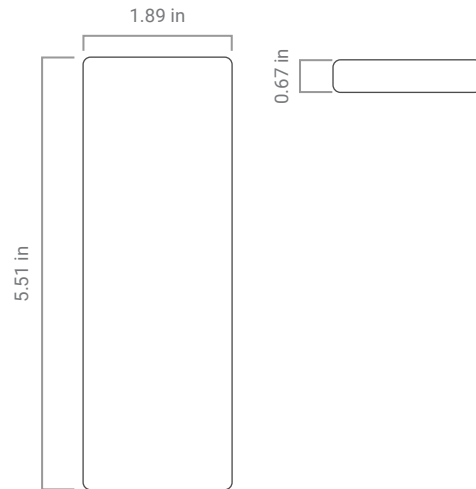

S3I WIRELESS RECIEVER

NF-S3I-WR-1009

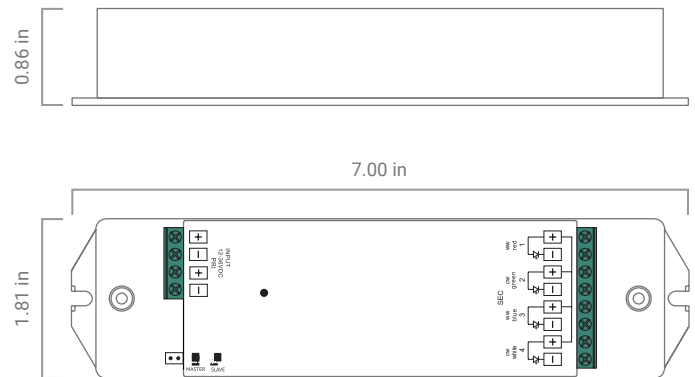

Nova Flex LED, LLC. retains the right to modify the design of our products at any time as part of the company's continual product improvement program.

PROJECT

FIXTURE

PHASE

DATE

Rev: Nov.15.24/10:11

800.595.6302

novaflexled.com