



ORDER GUIDE

NON-DIMMABLE DRIVER | 96W

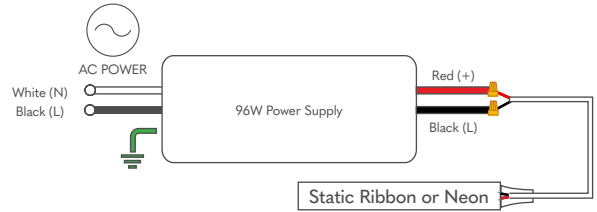

PART NUMBER



Notes:

INPUT

Voltage Range	120 - 277 VAC
Frequency	50 / 60 Hz
Current	0.96A Max
Inrush Current	5A Max @ 120V / 23.7A Max @ 277V
Efficiency	> 87% Max
Power Factor	> 0.95
THD	< 20%

PROTECTION

Over Current	Yes
Over Voltage	Yes
Over Temperature	Yes; Hiccup Mode
Over Load	Yes; CC Mode
Short Circuit	Yes; Hiccup Mode
Warranty	2 - 5 Years (based on warranty of linear product purchased)

OUTPUT


Voltage	24VDC
Current	4100mA Max
Ripple	> 3%
Line Regulation	> 2%
Load Regulation	> 3%
Turn on Delay Time	> 0.3 Sec
Optimal Load	Up to 95%
Dimming	Non-Dim
Dimming Control	0-10V

ENVIRONMENT

Protection Rating	UL IP65
Ambient Temp	-13° to 104° F (-25° to 40° C)
Max Case Temp	149° F (65° C)
Storage Temp	-40° ~ 176° F (-40° ~ 80° C) 10 ~ 95% HC
Expected Life	50,000 Hrs
Audible Noise	> 24dB Class A

PHYSICAL

Weight	30.4 oz
--------	---------

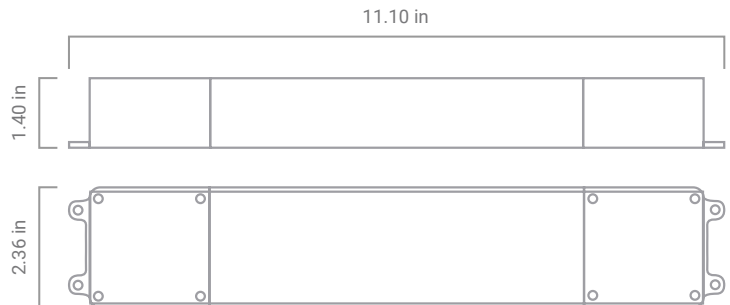

Nova Flex LED, LLC. retains the right to modify the design of our products at any time as part of the company's continual product improvement program.