

ORDER GUIDE - DUAL BEND RGB NF-NEON RGB 3.0W




PART NUMBER BUILDER:

Series	Family	Environment	Bend	Voltage	Color
NF	NEON	W'	DUAL	24V	RGB

Notes:

1. IP67 finished with our in-house custom injection molding

DIMENSIONS





Section	Dimensions
A	0.59" (14.97 mm)
B	0.63" (16.0 mm)

PHYSICAL

Environment	IP67
Ambient Temp	-13° to 113°F (-25° to 45°C)
Cut Length	1.97" Inches (5.00 mm)
Min. Bend Diameter	7.86" Inches (19.94 mm)
Bend Direction	Dual Bend (Top and Side Bend)
Max Run	16' Feet 4" Inches (4.97 m)
CCT Binning	2-step MacAdam
Jumper	26.1"

ILLUMINATION DETAILS; RED

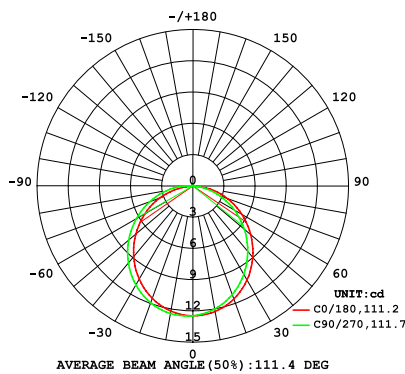

ELECTRICAL

Voltage	24v
Wattage	3.0w
Wire Size	20 AWG
Lead Wire	11.8" Inches / 3.28' Feet
Dimming	PWM / PFM IEEE PAR1789 No Effect Level Green for Flicker when used with Nova Flex drivers and Dimming modules.
Dimming Control	0-10V DALI DMX

QUALITY ASSURANCE

Lumen Maintenance	54,000 Hrs
Warranty	5 years
Certifications	cULus listed

Color	Peak Wave Length (nm)	FWHM (nm)	Output L/Ft	Efficacy L/W
Red	629	15	16	18
Green	520	26	64	61
Blue	462	18	10	11
RGB	462	29	88	31

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Nov.08.24.05:19

800.595.6302

novaflexled.com