

ORDER GUIDE - DUAL BEND STATIC WHITE NF-NEON SWH 3.0W




PART NUMBER BUILDER:

Series	Family	Environment	Bend	Voltage	Color
NF	NEON	W1	DUAL	24V	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 3500K <input type="checkbox"/> 4000K <input type="checkbox"/> 5000K

Notes:

1. IP67 finished with our in-house custom injection molding


DIMENSIONS

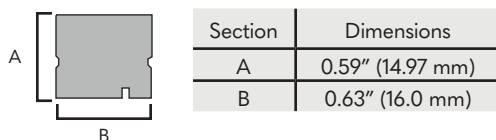

PHYSICAL

Environment	IP67
Ambient Temp	-13° to 113°F (-25° to 45°C)
Cut Length	1.97" Inches
Min. Bend Diameter	7.86" Inches
Bend Direction	Dual Bend (Top and Side Bend)
Max Run	16' Feet 4" Inches
CCT Binning	2-step MacAdam
Jumper	26.1"

ILLUMINATION DETAILS; 3000K

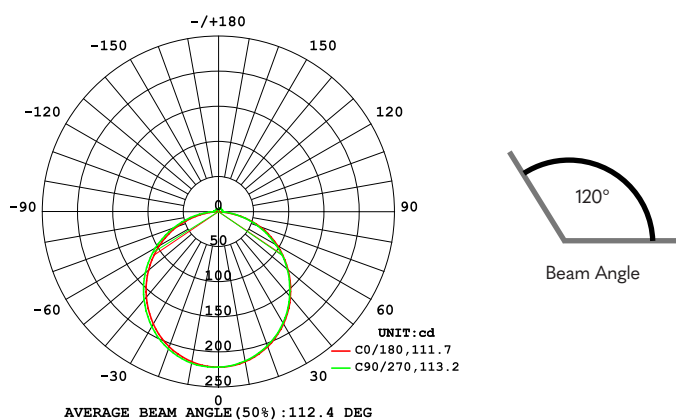

ELECTRICAL

Voltage	24v
Wattage	3.0w
CRI	90+
Wire Size	20 AWG
Lead Wire	11.8" Inches / 3.28' Feet
Dimming	PWM / PFM IEEE PAR1789 No Effect Level Green for Flicker when used with Nova Flex drivers and Dimming modules.
Dimming Control	0-10V MLV / ELV DALI DMX

QUALITY ASSURANCE

Lumen Maintenance	54,000 Hrs
Warranty	5 years
Certifications	cULus listed

Kelvin	Output L/Ft	Efficacy L/W	CRI Ra / R9	CRI Rf / Rg
2700K	211	69	-	-
3000K	214	70	93.5 / 65	89 / 97.1
3500K	217	71	-	-
4000K	220	72	-	-
5000K	224	74	-	-

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Nov.08.24.05:20

800.595.6302

novaflexled.com