


ORDER GUIDE - DIM TO WARM SIDE BEND

NF-NEON DTW 3.7W




PART NUMBER BUILDER:



Notes:

1. IP67 finished with our in-house custom injection molding
2. Refined finish IP68 available upon request with 7-10 week lead time
3. Salt and UV / Anti-yellow resistant, IK08 protection


DIMENSIONS



PHYSICAL

| | |
|--------------------|------------------------------|
| Environment | IP67, IP68 |
| Ambient Temp | -40° to 121°F (-40° to 49°C) |
| Cut Length | 2.46" Inches (6.25 mm) |
| Min. Bend Diameter | 11.81" Inches (29.99 mm) |
| Bend Direction | Side Bend |
| Max Run | 25.83' Feet (7.62 m) |
| Lead Wire | 1M, 3M |
| Jumper | 11.8" Inches |

ILLUMINATION DETAILS; 3000K

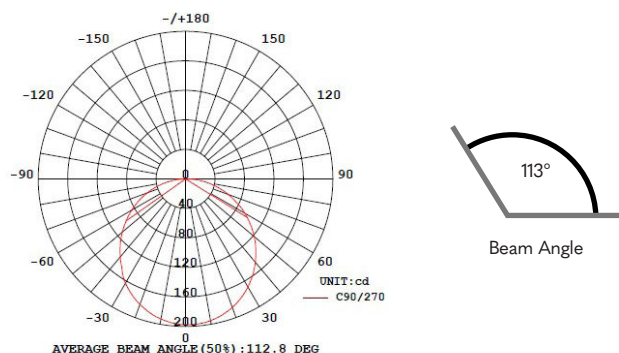

ELECTRICAL

| | |
|-----------------|---|
| Voltage | 24V |
| Wattage | 3.7 W/Ft |
| Wire Size | 18 AWG, 2-wires |
| Dimming Type | PWM / PFM IEEE PAR1789 No Effect Level Green for Flicker when used with Nova Flex drivers and Dimming modules. |
| Dimming Control | 0-10V MLV / ELV DALI DMX |

QUALITY ASSURANCE

| | |
|-------------------|--------------|
| Lumen Maintenance | 50,000 Hrs |
| Warranty | 5 years |
| Certifications | cULus Listed |

| Kelvin | Output L/Ft | Efficacy L/W | CRI Ra / R9 | CRI Rf / Rg |
|---------------|-------------|--------------|-------------|-------------|
| 3000K > 1800K | 152 | 15 | 90 / 57 | 91 / 99 |

Lumen values can vary +/- 10%

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Nov.08.24.05:18

800.595.6302

novaflexled.com