

ORDER GUIDE - DIM TO WARM TOP BEND

NF-NEON DTW VB 3.7W




PART NUMBER BUILDER:



Notes:

1. IP67 finished with our in-house custom injection molding
2. Refined finish IP68 available upon request with 7-10 week lead time
3. Salt and UV / Anti-yellow resistant, IK08 protection



DIMENSIONS



PHYSICAL

Environment	IP67, IP68
Ambient Temp	-40° to 121°F (-40° to 49°C)
Cut Length	2.46" Inches (6.25 mm)
Min. Bend Diameter	11.81" Inches (29.99 mm)
Bend Direction	Top Bend
Max Run	25.83' Feet (7.62 m)
Lead Wire	1M, 3M
Jumper	11.8" Inches

ILLUMINATION DETAILS; 3000K

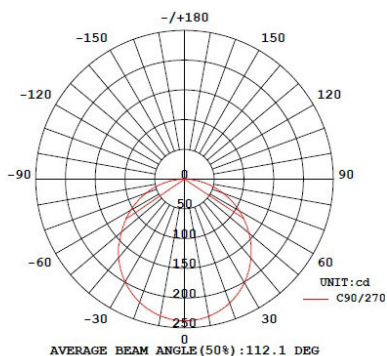

ELECTRICAL

Voltage	24V
Wattage	3.7 W/Ft
Wire Size	18 AWG, 2-wires
Dimming Type	PWM / PFM IEEE PAR1789 No Effect Level Green for Flicker when used with Nova Flex drivers and Dimming modules.
Dimming Control	0-10V MLV / ELV DALI DMX

QUALITY ASSURANCE

Kelvin	Output L/Ft	Efficacy L/W	CRI Ra / R9	CRI Rf / Rg
3000K > 1800K	183	13	90 / 57	91 / 99

Lumen values can vary +/- 10%

Lumen Maintenance	50,000 Hrs
Warranty	5 years
Certifications	cULus Listed

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Nov.08.24.05:18

800.595.6302

novaflexled.com