

ORDER GUIDE - MICRO NEON STATIC WHITE

NF-NEON MCN 2.7W




PART NUMBER BUILDER:

Series	Family	Environment	Type	Voltage	Kelvin	/ CRI
NF	NEON	WT'	MCN	24V		
					22K/80	
					27K/80	
					30K/80	
					35K/80	
					40K/80	
					57K/80	

Notes:

1. IP67 finished with our in-house custom injection molding
2. Salt and UV resistant (Anti-yellow), IK08 protection



DIMENSIONS



PHYSICAL

Environment	IP67
Ambient Temp	-40° to 122°F (-40° to 50°C)
Cut Length	3.28" Inches (8.33 mm)
Min. Bend Diameter	3.94" Inches (10.00 mm)
Bend Direction	Side Bend
Max Run	24.6'
Lead Wire	11.8" Inches (29.97 mm)
Jumper	11.8" Inches (29.97 mm)

ILLUMINATION DETAILS; 3000K

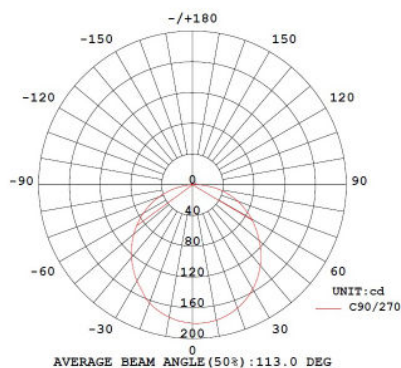

ELECTRICAL

Voltage	24V
Wattage	2.74 W/ft
Wire Size	22 AWG, 2-wires (RED = 24V, BLACK = ground)
Dimming	PWM / PFM IEEE PAR1789 No Effect Level Green for Flicker when used with Nova Flex drivers and Dimming modules.
Dimming Control	0-10V MLV / ELV DALI DMX

Kelvin	Output L/Ft	Efficacy L/W	CRI Ra / R9	CRI Rf / Rg
2200K	113	41.2	-	-
2700K	128	46.6	-	-
3000K	128	46.6	85.3 / 16	84 / 93
3500K	128	46.6	-	-
4000K	128	46.6	-	-
5700K	128	46.6	-	-

Lumen values can vary +/- 10%

QUALITY ASSURANCE

Lumen Maintenance	50,000 Hrs
Warranty	5 years
Certifications	cULus listed

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Nov.08.24.05:17

800.595.6302

novaflexled.com