

ORDER GUIDE - MICRO NEON STATIC WHITE

NF-NEON MCN 1.3W




PART NUMBER BUILDER:

Series	Family	Environment	Type	Voltage	Kelvin	/ CRI
NF	NEON	WT ¹	MCN	24V		
					27K/90 ⁴	
					30K/90 ⁴	
					35K/90 ⁴	
					40K/90 ⁴	



Notes:

1. IP67 finished with our in-house custom injection molding
2. Salt and UV resistance (Anti-yellow), IK08 protection
3. All configurations require a 7-10 week lead time

DIMENSIONS



ILLUMINATION DETAILS; 3000K

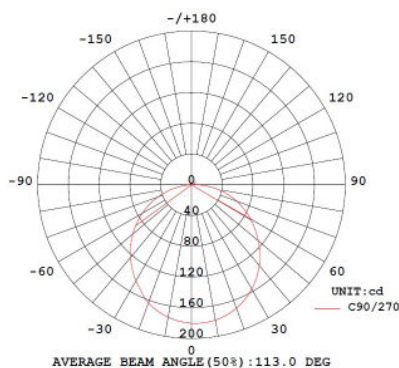

Kelvin	Output L/Ft	Efficacy L/W	CRI Ra / R9	CRI Rf / Rg
2700K	52	379	-	-
3000K	52	379	97 / 99	93 / 100
3500K	52	379	-	-
4000K	52	379	-	-

Lumen values can vary +/- 10%

PHYSICAL

Environment	IP67
Ambient Temp	-40° to 122°F (-40° to 50°C)
Cut Length	3.28" Inches (8.33 mm)
Min. Bend Diameter	3.94" Inches (10.00 mm)
Bend Direction	Side Bend
Max Run	49.2' Feet
Lead Wire	11.8" Inches (29.97 mm)
Jumper	11.8" Inches (29.97 mm)

ELECTRICAL

Voltage	24V
Wattage	1.37 W/Ft
Wire Size	22 AWG, 2-wires (RED = 24V, BLACK = ground)
Dimming	PWM / PFM IEEE PAR1789 No Effect Level Green for Flicker when used with Nova Flex drivers and Dimming modules.
Dimming Control	0-10V MLV / ELV DALI DMX

QUALITY ASSURANCE

Lumen Maintenance	50,000 Hrs
Warranty	5 years
Certifications	cULus listed

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Nov.08.24.05:17

800.595.6302

novaflexled.com