


# ORDER GUIDE - ROUND RGBW

## NF-NEON RGBW 4.6W




PART NUMBER BUILDER:

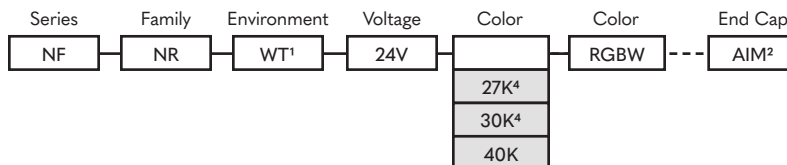

**Notes:**

1. IP67 finished with our in-house custom injection molding
2. Refined finish IP68 available upon request with 7-10 week lead time
3. Salt and UV resistant (Anti-yellow), IK10 protection
4. Color configuration available with 7-10 week lead time

### DIMENSIONS



### PHYSICAL

Environment	IP67
Ambient Temp	-40° to 113°F (-40° to 45°C)
Cut Length	3.94" Inches (10.00 cm)
Min. Bend Diameter	4.72" Inches (11.98 cm)
Bend Direction	Side Bend
Max Run	20.69' Feet (6.30 m)
Lead Wire	1M, 3M, or 5M
Jumper	0.5M, 1M

### ILLUMINATION DETAILS

Color	Output L/Ft	Efficacy L/W
RGBW	37	8

Lumen values can vary +/- 10%

### ELECTRICAL

Voltage	24V
Wattage	4.6 W/ft
Wire Size	22 AWG 5-wires 24V = Black, Red = Red, Green = Green, Blue = Blue, White = White
Dimming	0-10V, MLV, ELV Triac, PWM, External Controller No Effect Level Green for Flicker when used with Nova Flex drivers and Dimming modules.
Dimming Control	0-10V   DALI   DMX

### QUALITY ASSURANCE

Lumen Maintenance	50,000 Hrs
Warranty	5 years
Certifications	cULus Listed

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Nov.08.24.05:12

800.595.6302

novaflexled.com