


ORDER GUIDE - ROUND STATIC WHITE

NF-NEON SWH 3.7W




PART NUMBER BUILDER:

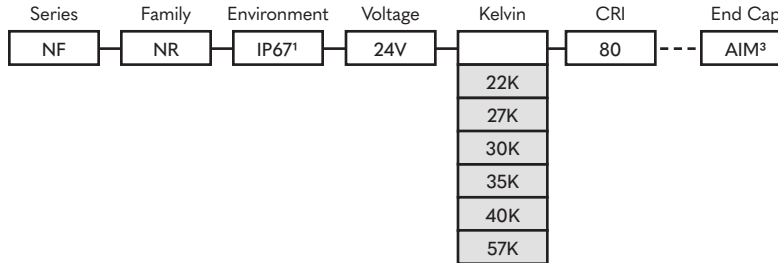

Notes:

1. IP67 finished with our in-house custom injection molding
2. Refined finish IP68 available upon request with 7-10 week lead time
3. Salt and UV resistant (Anti-yellow), IK10 protection

DIMENSIONS



PHYSICAL

Environment	IP67
Ambient Temp	-40° to 131°F (-40° to 55°C)
Cut Length	3.28" Inches (8.33 cm)
Min. Bend Diameter	4.72" Inches (11.98 cm)
Bend Direction	Side Bend
Max Run	25.69' Feet (7.83 m)
Lead Wire	1M, 3M, or 5M
Jumper	0.5M, 1M

ILLUMINATION DETAILS

Kelvin	Output L/Ft	Efficacy L/W
2700K	116	32
3000K	143	39
3500K	143	39
4000K*	143	39
5000K	143	39

Lumen values can vary +/- 10%

ELECTRICAL

Voltage	24V
Wattage	3.7 W/ft
Wire Size	18 AWG, 2-wires
Dimming	PWM / PFM IEEE PAR1789 No Effect Level Green for Flicker when used with Nova Flex drivers and Dimming modules.
Dimming Control	0-10V MLV / ELV DALI DMX

QUALITY ASSURANCE

Lumen Maintenance	50,000 Hrs
Warranty	7 years
Certifications	cULus Listed

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Nov.08.24.05:12

800.595.6302

novaflexled.com