


ORDER GUIDE - SIGNATURE SERIES

SS-DTW | DIM TO WARM



ORDER CODE BUILDER:

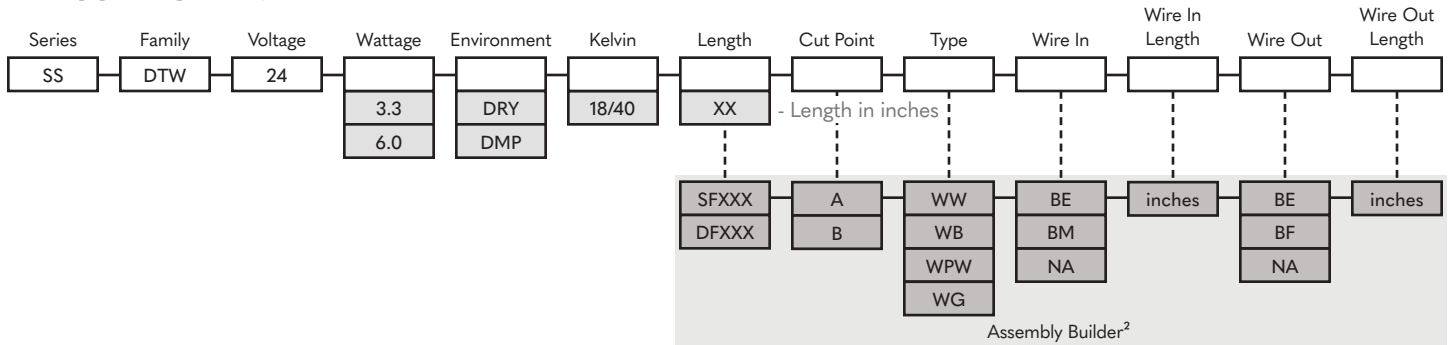

EXAMPLE ORDER CODE: SS-DTW-24-3.3-DRY-18/40-SF90-A-WW-BE-60-BE-5

Notes:

1. Actual values may vary +/- 10%
2. For continuous links consult the factory

ENVIRONMENT

Wire environment will match Linear environment

DRY	IP20
DMP	IP67

WIRE TYPE

Wire environment will match Linear environment

WW	Wire White 20AWG
WB	Wire Black 20AWG
WPW	Wire Plenum White 18AWG
WG	Wire Grey 18AWG

LENGTH - AS AN ASSEMBLY

For continuous links consult the factory




Single Fed - Length in Inches - 3 digits




Double Fed - Length in Inches - 3 digits

CUT POINT

If desired strip length is not possible, should the factory cut above or below your desired length:

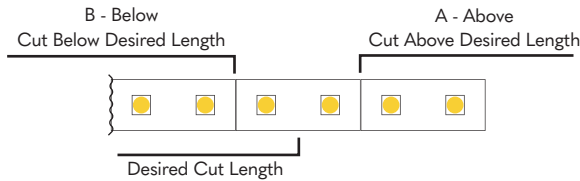

WIRE IN

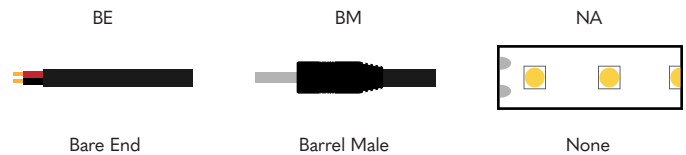

WIRE OUT

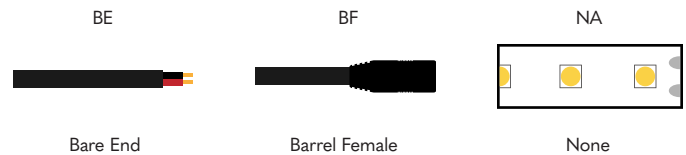


IMAGE:



Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program