

# ORDER GUIDE - TECHNICAL INFO

## SS-DTW




**Notes:**

1. Actual values may vary +/- 10%

### ILLUMINATION DETAILS; KELVIN

CCT	3.3W	6.0W	3.3W	6.0W	3.3W	6.0W	3.3W	6.0W	3.3W	6.0W	3.3W	6.0W
	Lumens/Ft		Lumens/W		CRI Ra		CRI R9		TM30 Rf		TM30 Rg	
IP20 @ 4000K	247	419	75	70	96	97	96	97	95	95	101	101
IP20 @ 1800K	5	8	50	42	95	96	91	90	95	95	101	101
IP67 @ 4000K	224	407	68	68	96	97	95	95	95	95	101	101
IP67 @ 1800K	4	8	40	42	95	95	90	90	95	95	101	101

### ENVIRONMENT AND DIMENSIONS

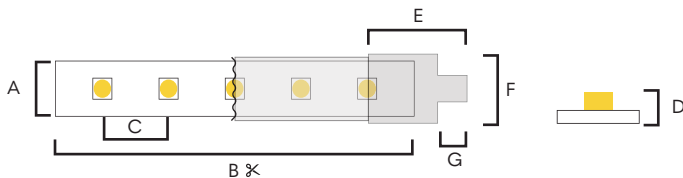

Section	IP20	IP67
A	10mm	12.1mm
B	33.3mm	33.3mm
C	8.9mm	8.9mm
D	2.2mm	4.6mm
E	-	8.14mm
F	-	14.2mm
G	-	3.18mm

### PHYSICAL

Environment	IP20 (Indoor only) IP67 (Dust/splash proof)	
Ambient Temp	-13° to 158°F (-25° to 70°C)	
Cut Length	2.46" Inches (62.5 mm)	
Min. Bend Diameter	IP20: 1.97" Inches (5 cm) IP67: 2.75" Inches (7 cm)	
Max Run	3.3W	30' Feet (9.14 m)
	6.0W	16.0' Feet (4.87 m)

### ELECTRICAL

Voltage	24V - Dimmable
Wire Size (minimum)	20 AWG. 2 Conductor
Lumen Maintenance	50,000 Hrs
Warranty	5 years
Certifications	cULus   Closet Rated

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Nov.22.24.01:46

800.595.6302

novaflexled.com