


RESOURCE - INJECTION MOLD DIMENSIONS

120V FLEX LINE



INJECTION MOLDED LEAD OPTIONS


BACK
with plug
or hardwire

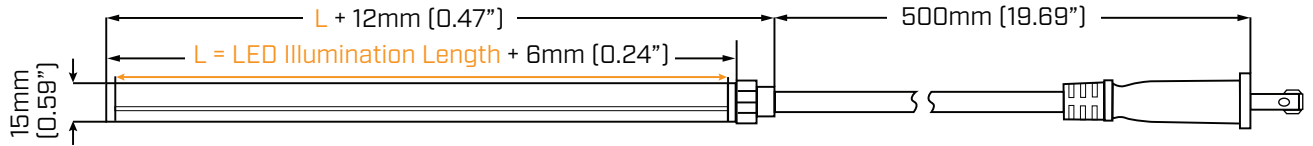

Plug-in complies with UL2388

Please note, this water wicking barrel helps prevent water from running down the wire into the fixture. Length is .5", diameter is .5". DO NOT REMOVE.

BOTTOM
with plug
or hardwire

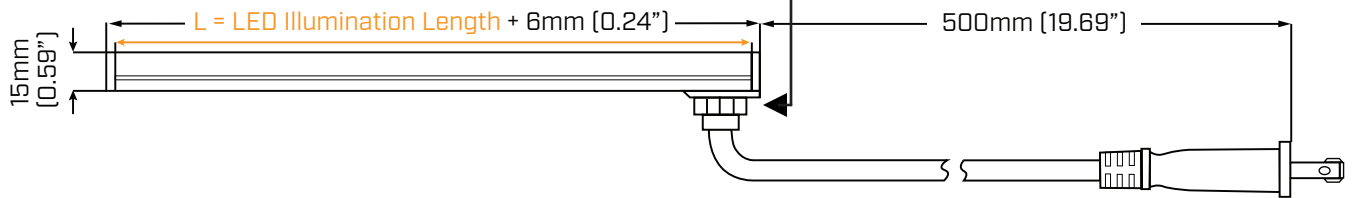

Plug-in complies with UL2388

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Jan.03.25.01:28

800.595.6302

novaflexled.com