

# ORDER GUIDE - POWER & CONTROL

## HANDHELD ADJ DIMMER | S3I



PART NUMBER




Notes:

### DATA


Output Signal	RF Signal
Operation Frequency	869.5 / 916.5 / 434 MHz
Power Supply	3 AAA Batteries (included)
Operating Temperature	32° to 86° F (0° to 30° C)
Wireless Range	50' Ft (15.24 m)
Input Voltage	12 ~ 36 VDC
Dimming	PWM / PFM   IEEE PAR1789 No Effect Level Green for Flicker when used with Nova Flex drivers and Dimming modules.
Dimming Control	Proprietary RF

### DIMENSIONS

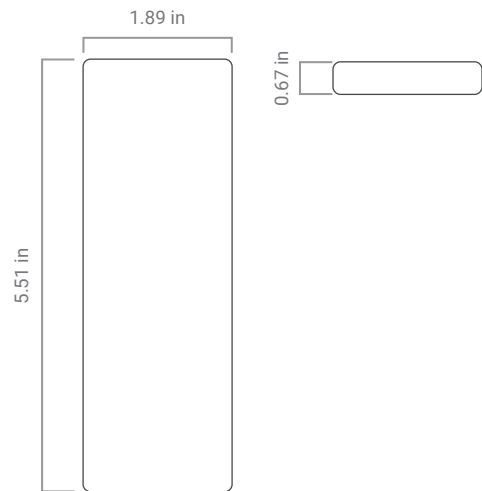

## S3I WIRELESS RECIEVER

NF-S3I-WR-1009

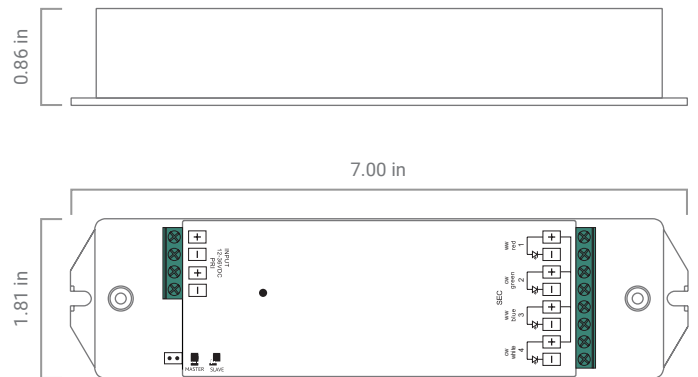

Nova Flex LED, LLC. retains the right to modify the design of our products at any time as part of the company's continual product improvement program.