

MAXX 30W DIMMABLE DRIVER

Product Code: NF-PS-MAXX-30W-24V-0/10V

NOVA FLEX[®]



Input

Voltage Range	100 - 277 VAC
Frequency	47 - 63Hz
Current	0.5A
Inrush Current	7A, 50% @ 120VAC 12A, 50% @277VAC
Efficiency	79% @ 120VAC 80% @ 277VAC
Power Factor	> 0.99 @ 120VAC, 0.95 @ 277VAC
THD	< 20%

Output


Voltage	24VDC
Current	1.25A
Load Regulation	1%
Optimal Load	10% - 95%

Dimming

Dimming Control	0-10V
Dimming Level	0.01%

Compatible with Lutron DVST-WH and DVT-WH dimmers.

Wiring Diagram

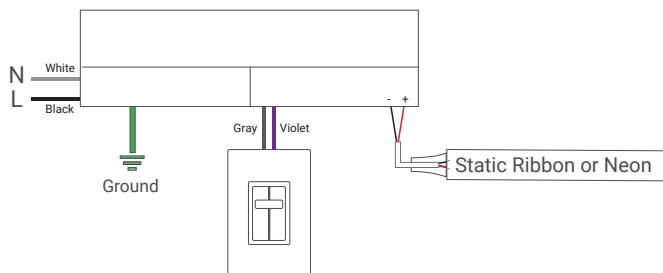

Protection


Over Temperature	Yes
Over Load	Yes
Short Circuit	Yes
Warranty	2 - 5 years (based on warranty of ribbon/neon purchased)
Protection Rating	cULus Listed

Environment

Protection Rating	UL Listed (UL8750), cUL Listed, Class 2 Unit, Type HL rated. FCC
Operating Temp	-40° to 104° F (-40° to 60° C)
Storage Temp	-40° to 176° F (-40° to 80° C)

Physical

Weight	33.5 oz
--------	---------

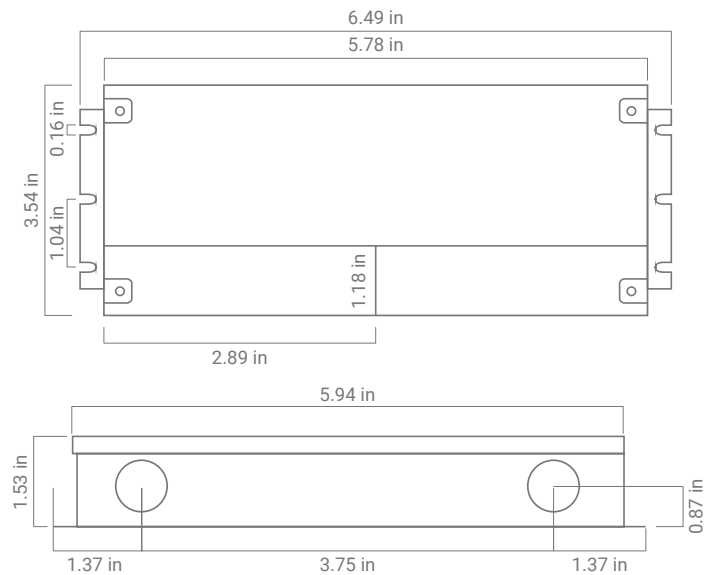

FOR MORE
INFORMATION
CLICK HERE

PROJECT SUPPORT

INSTALLATION GUIDES

WHY NOVA FLEX

RESOURCES