


ORDER GUIDE - DESIGN SERIES STATIC WHITE

NFDS-STW 2.4W | NF-DS-64




PART NUMBER BUILDER:

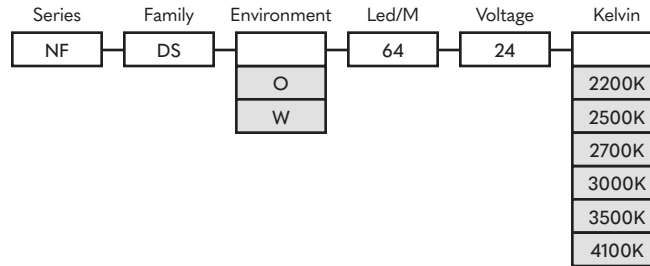

Notes:
W (IP68) requires lead time of 7-10 weeks.

ENVIRONMENT AND DIMENSIONS (INCHES UNLESS SHOWN)

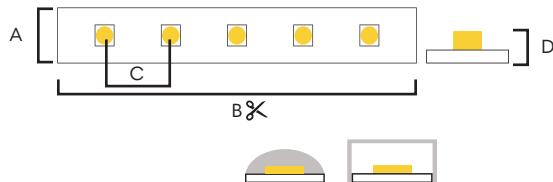

Section	O - Damp	W - Wet
A	0.40	0.47
B	4.92	4.92
C	0.60mm	0.60mm
D	0.14	0.20

KELVIN

CCT	Lumens/Ft	CRI Ra	Efficacy	Max Run
2200K	164	87	68	3f
2500K	224	90	93	
2700K	309	93	129	
3000K	256	92	107	
3500K	255	92	106	
4100K	243	92	101	

PHYSICAL

Environment	IP65 (Dust/splash proof) IP68 (Water/chemical resistant)
Operating Temp	IP65: -15° to 140°F (-25° to 60°C) IP68: -15° to 176°F (-25° to 80°C)
Cut Length	4.92" Inches
Min. Bend Diameter	1.57" Inches
Max Run	31.0" Feet

ELECTRICAL

Voltage	24v
Wire Size	20 AWG. 2 Wire
Lead Wire	Default: 120" Inch IP65: 2" Inch Minimum IP68: 3" Inch Minimum Quick Connect: 3" - 120" Inch
Jumper	IP65 & IP68: 3" Inch Minimum
Dimming	MLV 0-10V S3i Series Controller OTHERs

QUALITY ASSURANCE

Lumen Maintenance	50,000 Hrs
Warranty	5 years
CCT Binning	3-step MacAdam
Jumper	IP65 & IP68: 3" Inch Minimum
Certifications	UL Title 24 JA8 - 2019

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Oct.20.23.06:21

800.595.6302

novaflexled.com