


# ORDER GUIDE - DUAL BEND STATIC COLOR NF-NEON STC 3.0W




PART NUMBER BUILDER:

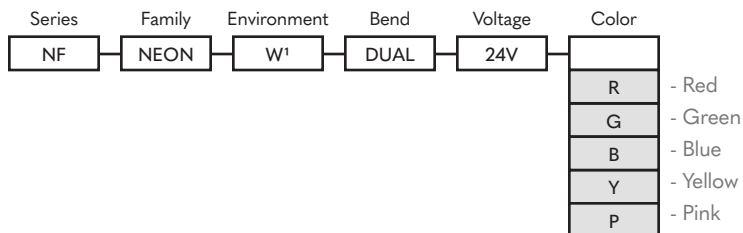

**Notes:**

1. IP67 finished with our in-house custom injection molding


## DIMENSIONS

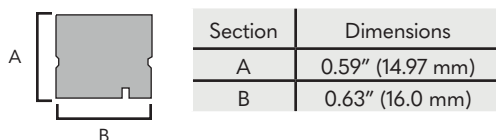

## PHYSICAL

Environment	IP67
Ambient Temp	-13° to 113°F (-25° to 45°C)
Cut Length	1.97" Inches (5.00 mm)
Min. Bend Diameter	7.86" Inches (19.96 mm)
Bend Direction	Dual Bend (Top and Side Bend)
Max Run	16' Feet 4" Inches
CCT Binning	2-step MacAdam
Jumper	26.1"

## ILLUMINATION DETAILS; RED

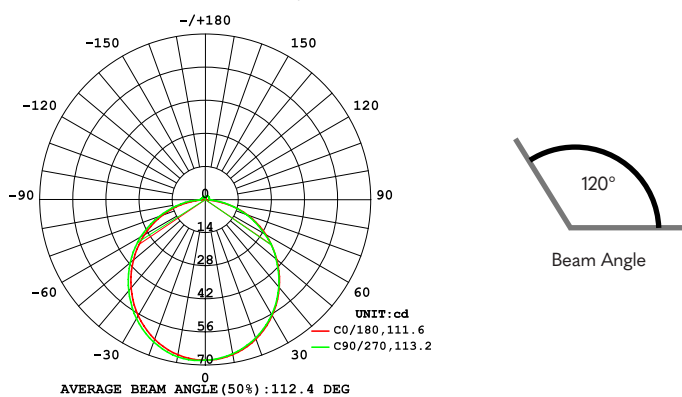

## ELECTRICAL

Voltage	24v
Wattage	3.0w
Wire Size	20 AWG
Lead Wire	11.8" Inches / 3.28' Feet
Dimming	PWM / PFM   IEEE PAR1789 No Effect Level Green for Flicker when used with Nova Flex drivers and Dimming modules.
Dimming Control	0-10V   MLV / ELV   DALI   DMX

## QUALITY ASSURANCE

Lumen Maintenance	54,000 Hrs
Warranty	5 years
Certifications	cULus listed

Color	Peak Wave Length (nm)	FWHM (nm)	Output L/Ft	Efficacy L/W
Red	635	15	91	30
Green	520	27	276	91
Blue	460	18	53	17
Yellow	593	14	83	27
Pink	456	18	142	47

Lumen values can vary +/- 10%

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Nov.08.24.05:20

800.595.6302

novaflexled.com