


# ORDER GUIDE - ROUND DRGBW

## NF-NEON DRGBW 4.6W




### PART NUMBER BUILDER:

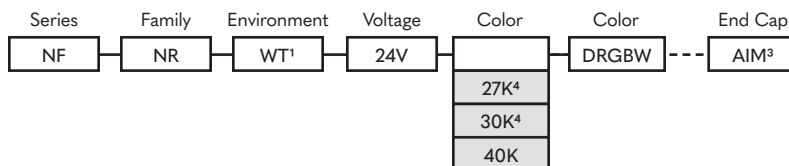

#### Notes:

1. IP67 finished with our in-house custom injection molding
2. Refined finish IP68 available upon request with 7-10 week lead time
3. Salt and UV resistant (Anti-yellow), IK10 protection
4. Color configuration available with 7-10 week lead time

### DIMENSIONS



### PHYSICAL

Environment	IP67
Ambient Temp	-40° to 113°F (-40° to 45°C)
Cut Length	4.92" Inches (12.49 cm)
Min. Bend Diameter	4.72" Inches (11.98 cm)
Bend Direction	Side Bend
Max Run	20.77' Feet (6.33 m)
Lead Wire	1M, 3M, or 5M
Jumper	0.5M, 1M

### ILLUMINATION DETAILS

Color	Output L/Ft	Efficacy L/W
R	12	3.2
G	34	9.2
B	6	1.6
DRGBW 27K	34	7
DRGBW 30K	34	7
DRGBW 40K	34	7

Lumen values can vary +/- 10%

### ELECTRICAL

Voltage	24V
Wattage	4.6 W/ft
Wire Size	18 AWG, 3-wires 24V = Red, Ground = Black, Data = Green
Dimming	DRGB Specific Controls: SPI, No Clock   UCS 2903 Chipset No Effect Level Green for Flicker when used with Nova Flex drivers and Dimming modules.

Please note, to avoid signal errors, the max acceptable distance from the decoder to the tape/fixture is 16.4'

### QUALITY ASSURANCE

Lumen Maintenance	50,000 Hrs
Warranty	5 years
Certifications	cULus Listed

Nova Flex retains the right to modify the design of our products at any time as part of the company's continual product improvement program

PROJECT

FIXTURE

PHASE

DATE

Rev: Nov.08.24.05:12

800.595.6302

novaflexled.com